



**Available Lengths**

- nT1AA05A – 1.8 Mtrs
- nT1AA05B – 3.0 Mtrs
- nT1AA05C – 5.0 Mtrs
- nT1AA05D – 10.0 Mtrs
- nT1AA05E – 15.0 Mtrs




**DESCRIPTION**

XLR Male to 6.35 mm st cable is made up of high quality shielded microphone cable using pure annealed oxygen free copper . Perfectly suitable for connecting audio systems like mixer , amplifier , av players etc . Uses rugged high quality xlr and 6.35 st connectors for perfect crisp clear audio output . Full metal xlr connector and dual moulded 6.35 st connectors provides full protection and long life . Available in vareous lengths of choice 1.8 , 3 , 5 , 10 and 15 meter lengths .





## Specification

Connector A	:	XLR M
Housing	:	Metal
Coating	:	Nickel / Tin
Connector B	:	6.35 st
Housing	:	Dual molded
Coating	:	Nickel / TIN
Cable	:	2 C 24 awg mic cable
No of Cores	:	2 + Shield
Conductor	:	Tin Coated Oxygen Free Copper
Shield	:	Tin Coated Oxygen Free Copper
Colour	:	Black
Length Available	:	1.8 , 3 , 5 , 10 , 15mtrs .

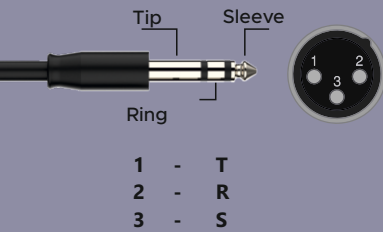

## XLR M TO 6.35 ST

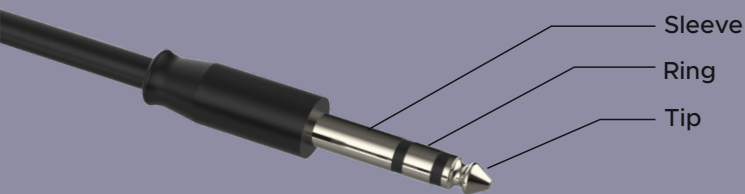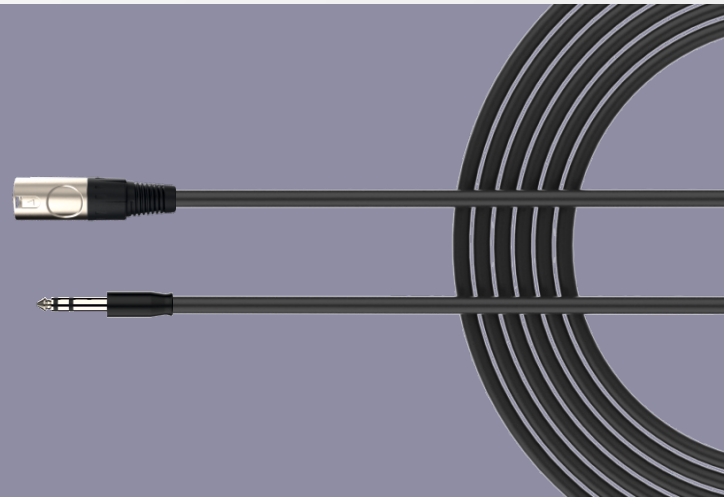

## XLR M

Webpage



Youtube

