

## DESCRIPTION


BNC M TO BNC M Composit Video cable is made up of 75 Ohms 59 series Video Coaxial Cable. Rugged BNC Connectors crimped on both the ends with Strain relief on both the sides for extra long life. The cable and connectors are rugged and sturdy - suitable for rough conditions. The cable is 90% shielded and the center conductor is Annealed Oxygen free copper. The connectors are locking type , pin is gold plated and the shell is Nickel Plated . Longer strain relief to avoid bending losses. Available Lengths : 1- 100 Mtrs .



**Specification**

Connector A	:	BNC M Crimp type
Housing	:	Brass
Coating	:	Nickel / Gold
Connector B	:	BNC M
Housing	:	Dual moulded
Coating	:	Nickel / Gold
Cable	:	75 Ohms
Conductor	:	Bare copper 22 AWG
Colour	:	Black / Blue
Shield	:	90 % Tin Coated Copper
Length Available	:	1 - 100mtrs.

**BNC M TO BNC M**

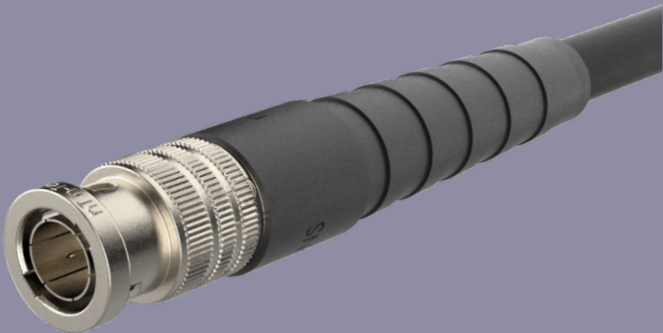

**75 Ohms Coaxial Cable**  
**Heavy Duty BNC Connectors**  
**Gold Plated Pins.**  
**Long Strain Relief**



Webpage



Youtube

