



DESCRIPTION


BNC F TO BNC M Composit Video cable is made up of 75 Ohms 59 series Video Coaxial Cable . Rugged BNC Connectors crimped on both the ends with Strain relief on both the sides for extra long life . The cable and connectors are rugged and sturdy - suitable for rough conditions . The cable is 90% shielded and the center conductor is Annealed Oxygen free copper . The connectors are locking type , pin is gold plated and the shell is Nickel Plated . Longer strain relief to avoid bending losses . Available Lengths : 1- 100 Mtrs .



Specification

Connector A	:	BNC M Crimp type
Housing	:	Brass
Coating	:	Nickel / Gold
Connector B	:	BNC F
Housing	:	Dual moulded
Coating	:	Nickel / Gold
Cable	:	75 Ohms
Conductor	:	Bare copper 22 AWG
Colour	:	Black / Blue
Shield	:	90 % Tin Coated Copper
Length Available	:	1 - 100mtrs.

BNC M TO BNC F

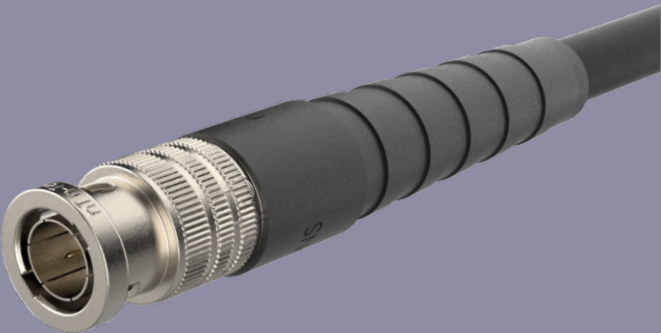

75 Ohms Coaxial Cable
Heavy Duty BNC Connectors
Gold Plated Pins.
Long Strain Relief



Webpage



Youtube

