


USB CM TO DVI D 24+1 CABLE

nT01BD14



nT
n - TECH SOLUTIONS
SOLUTIONS FOR GROWTH

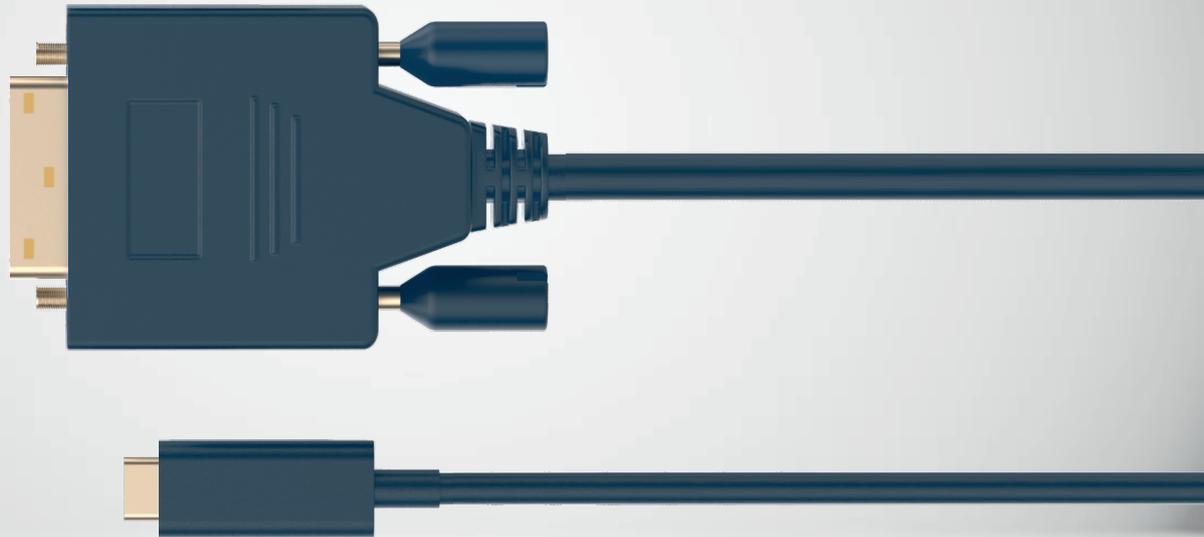


DESCRIPTION

nT01BD14 USB CM TO DVI D 24+1 CABLE

USB 3.1 CM to DVI is a video cable . The cable and the connector is fully shielded and the pins are gold coated . The Cables allows you to connect the USB C & Thunderbolt laptop / computer to the DVI display monitor , projector . supports 1920 x 1200 60 Hz resolution. The C port is connected to the source and DVI is connected to the display . - the cable dose not suppot bidirectional function . The c connector is reversible. The cable is constructed with shielded twisted pairs and multi core wires and the gauge ranges from 26 to 34 awg . Available Lengths : 1.8 - 5 mtrs . Applications : IT infrasucture , Control room , Education , studio

USB CM TO DVI D 24+1 CABLE


nT01BD14

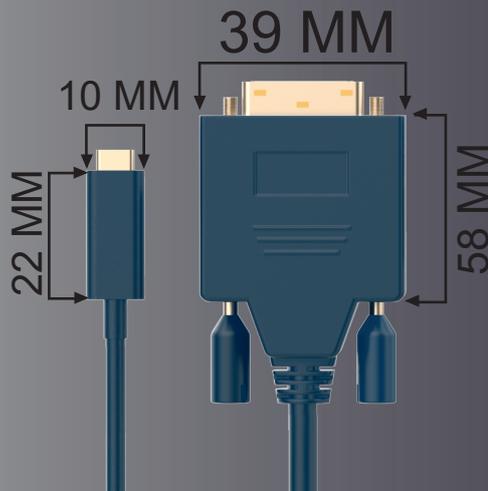

Specification


Connector A	: USB C M Connector
Housing	: Dual Moulding
Coating	: Gold
Connector B	: DVIM Connector
Housing	: Plastic Shell
Coating	: Gold
Cable	: High Speed Shielded twisted pair + Multi core + al foil + shield+ pvc -
Resolution	: 1920 X 1200 60 Hz
Source	: USB C M
Display	: DVI
Conductor	: Tin Coated Copper 26-34 AWG
Shield	: 90 % Tin coated copper
Colour	: Black / Blue
length available	: 1.8 - 5 Mtrs

Shell is grounded and connected to the shield on both the ends

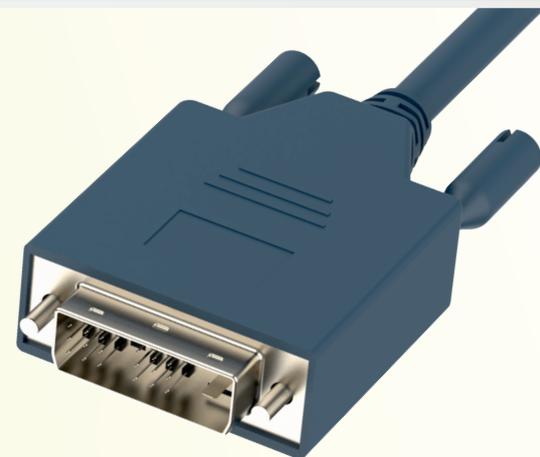

Gauge 26-34 awg

Dose not support bidirectional function.

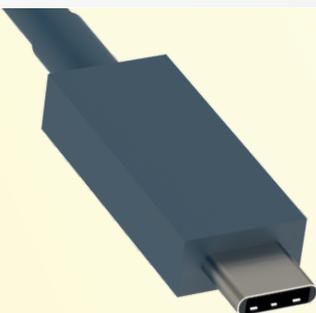

Webpage



Youtube

