



DESCRIPTION

1BF05 SDI BNC M TO SDI BNC M 6G SDI 6 CABLE

SDI M to SDI BNC M cable is made of SDI 6 Cable , the cable supports 6G Signals . The cable supports connection between normal BNC to BNC devices . BNC Connectors are made of Brass and teflon material. The connectors are nickel coated and pin is gold plated . The connectors and cables are 75 ohms and supports up to 6 G Signals and resolutions up to 1080p 60 Hz . The connectors are machine crimped to the cable. The coaxial cable conductor is 18 awg and shielding is 95% coverage for the best performance . Colour : Black . Available Length 1 - 100 Mtrs .

BNC M TO SDI BNC M 6G SDI 6 CABLE

nT 01BF05






Specification

Connector A	:	BNC M Connector
Housing	:	Brass + PVC Strain relief
Coating	:	Nickel /Gold
Connector B	:	BNC M Connector
Housing	:	Brass + PVC Strain relief
Coating	:	Nickel /Gold
Connection Type	:	Machine C Crimping
Cable	:	Coaxial Cable
Ohms	:	75
Resolution	:	1080p 60 Hz
Speed	:	6G
Center Conductor	:	Copper 18 AWG
Shield	:	95 % Tin Coated Copper
Colour	:	Black
Length Available	:	1 - 100 Mtrs

Nickel plated body and gold plated pins

Supports 75 Ohms

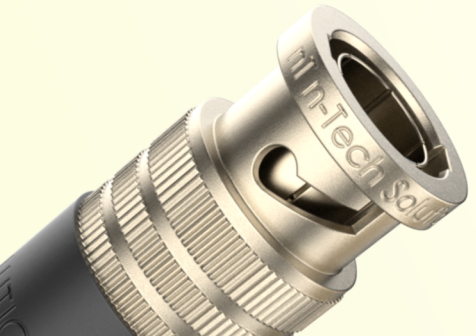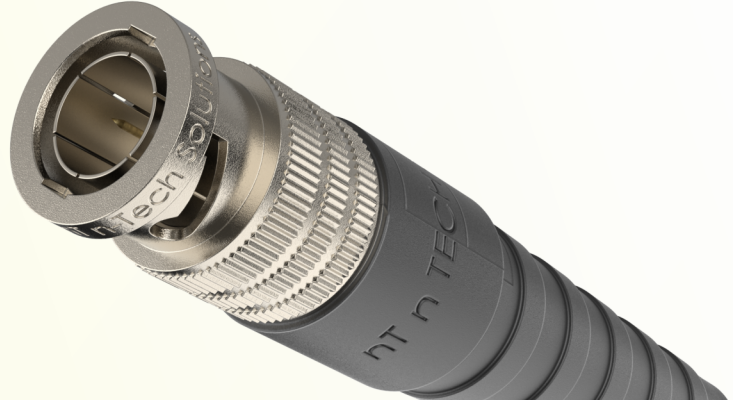

Support Video and Audio Signals .

Supports 1080p 60 Hz resolutions

Webpage

Youtube

