

USB 3.2 CM TO CM CABLE

nT01BG01



nT
n - TECH SOLUTIONS
SOLUTIONS FOR GROWTH



DESCRIPTION

nT01BG01 USB 3.2 CM TO CM CABLE

USB 3.2 CM to CM is full featured Gen 2 cable . The cable and the connectr is fully shielded with gold plated pins. It supports Power , data and av . The cable supports 5A(100W)Power output. The cable supports 4k60Hz video signals . The data speed supputed up to 10 Gbps for 1 mtr and 5 Gbps for 2 and 3 mtrs . The cable is with E-marker IC and the c connector is reversible .The cable is constructed with shielded twisted pairs and multi core wires and the gauge ranges from 26 to 34 awg . Available Lengths : 1 - 3 mtrs . Applications :VR , Power , Data transfer , Video conferencing , AV Connectivity , Docking

USB 3.2 CM TO CM CABLE

nT01BG01



nT
n - TECH SOLUTIONS
SOLUTIONS FOR GROWTH

Specification

Connector A	:	USB C M + PCB Full Shielded
Housing	:	ABS + PVC Overmoulding
Coating	:	Nickel / Gold
Connector B	:	USB C M + PCB Full Shielded
Housing	:	ABS + PVC Overmoulding
Coating	:	Nickel / Gold°
Connection type	:	Machine Soldering , Shield Crimping
Cable	:	flexible - twisted pair and multicore cable + al foil + drainwire + shield + pvc insulation
Gauge	:	26 - 34 Awg
Conductor	:	Tin coated Copper
Speed	:	10 Gbps (1m) 5 Gbps (2/3 m)
Version	:	USB 3.2 GEN 2 Backward compatible with USB 3.0 , USB 2.0 , USB1.1
Power	:	5A - 100 W
Resolution	:	4k 60 Hz
Protection	:	EMI & RF Protection
Colour	:	Black
Length Available	:	1 - 4 mtrs




Supports Speed 10 Gbps Speed up to 1 Mtrs
and 5 Gbps for 2 and 3 mtrs .



Power Supported 5A (100 W)



Available Lengths - 1 - 4 mtrs

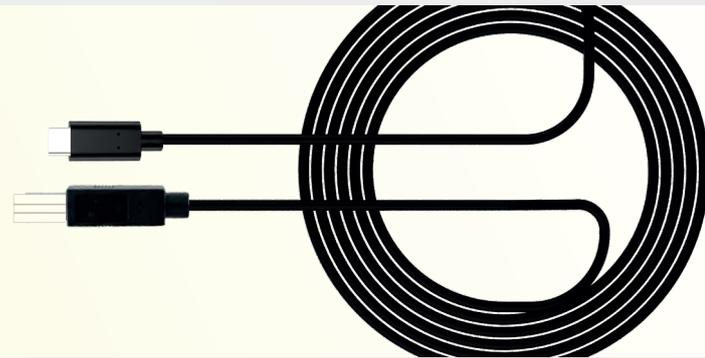

Webpage



Youtube

