


USB 3.1 AM TO CM CABLE

nT01BG02



nT
n - TECH SOLUTIONS
SOLUTIONS FOR GROWTH

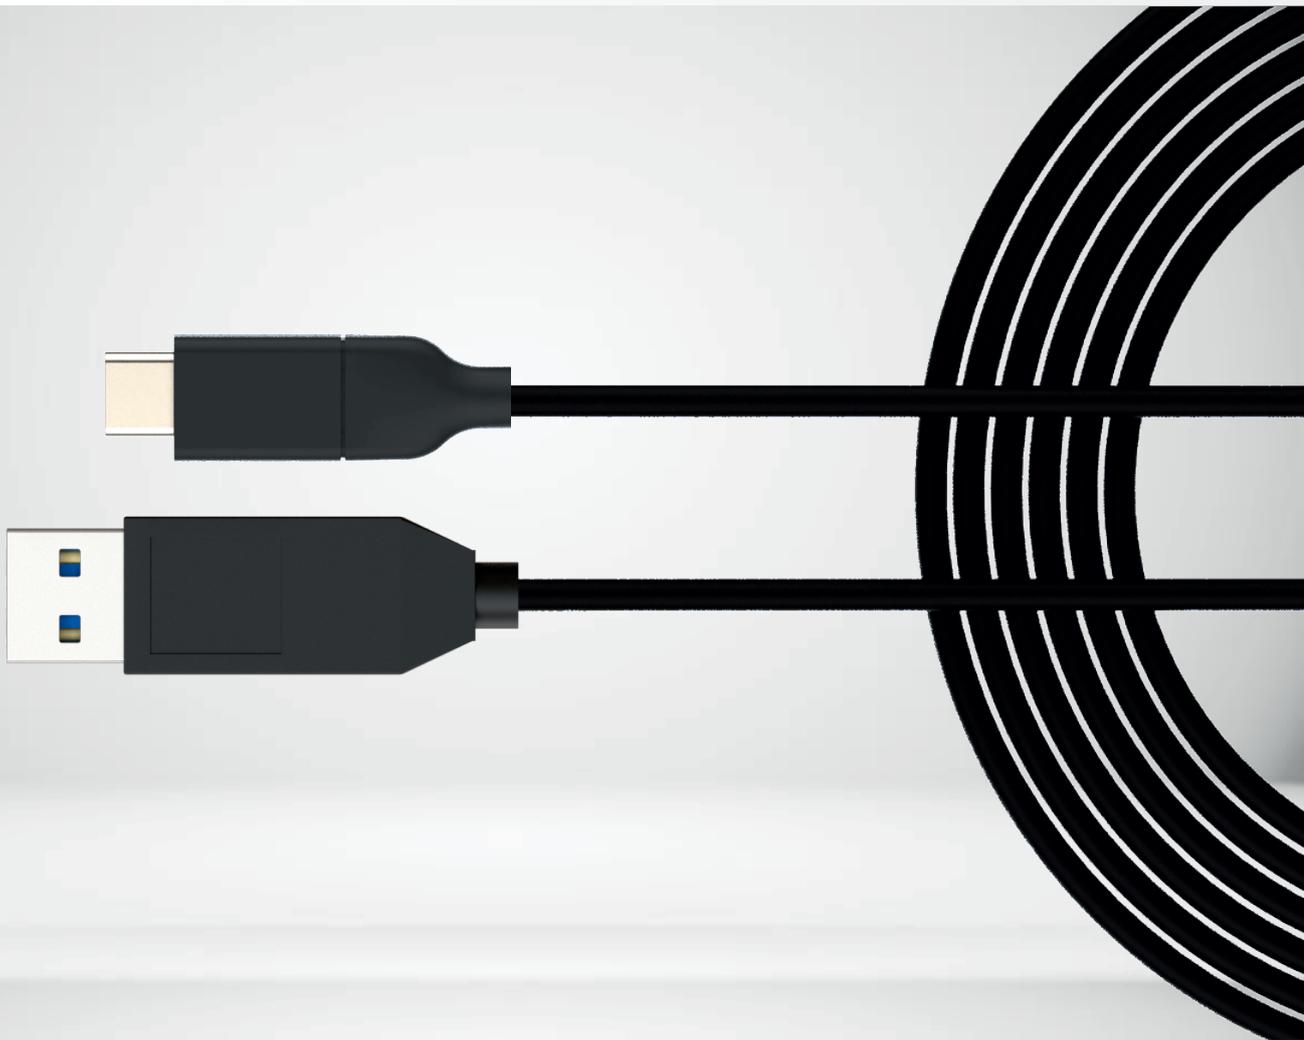

DESCRIPTION

nT01BG02 USB 3.1 AM TO CM CABLE

USB 3.1 AM to CM is a data and charging cable . The cable and the connector is fully shielded with gold plated pins . It supports Power and data . The cable supports 3A (15W) Power output . The data speed supported up to 5 Gbps for 1 - 3 mtrs . The A port is connected to the host and C is to the devices - the c male cannot be connected to the Host . The c connector is reversible .The cable is constructed with shielded twisted pairs and multi core wires and the gauge ranges from 26 to 34 awg . Available Lengths : 1 - 3 mtrs . Applications : VR, power, Data transfer , Video conferencing , Docking

USB 3.1 AM TO CM CABLE


nT01BG02



nT
n - TECH SOLUTIONS
SOLUTIONS FOR GROWTH

Specification

Connector A	:	USB A M Full Shielded
Housing	:	ABS + PVC Overmoulding
Coating	:	Nickel / Gold
Connector B	:	USB C M Full Shielded
Housing	:	ABS + PVC Overmoulding
Coating	:	Nickel / Gold
Connection type	:	Machine Soldering , Shield Crimping
Cable	:	flexible - twisted pair and multicore cable + al foil + drainwire + shield + pvc insulation
Gauge	:	26 - 34 Awg
Conductor	:	Tin coated Copper
Speed	:	5 Gbps (1 - 3 m)
Version	:	USB 3.1 Backward compatible with USB 3.0,USB 2.0,USB 1.1,
Power	:	3A - 15 W
Host	:	USB C M
Protection	:	EMI & RF Protection
Length Available	:	1 - 3 mtrs

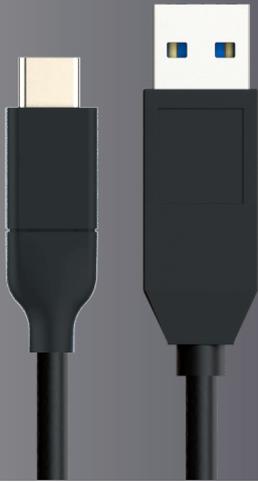


Supports Speed 5 Gbps



Power Supported 3A (15 W)

Available Lengths - 1 - 3 mtrs

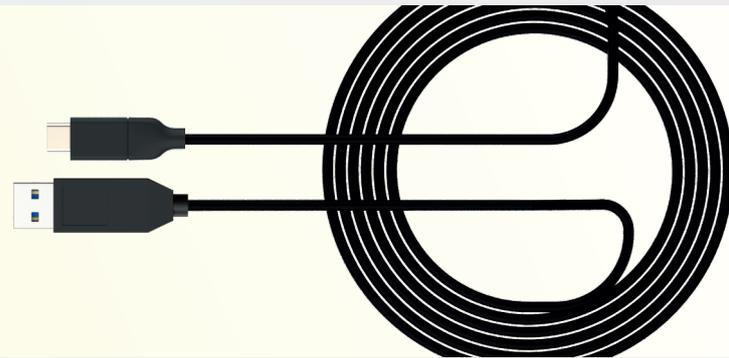

Webpage



Youtube

