


USB 3.1 CM TO MICRO BM CABLE

nT01BG05



nT
n - TECH SOLUTIONS
SOLUTIONS FOR GROWTH

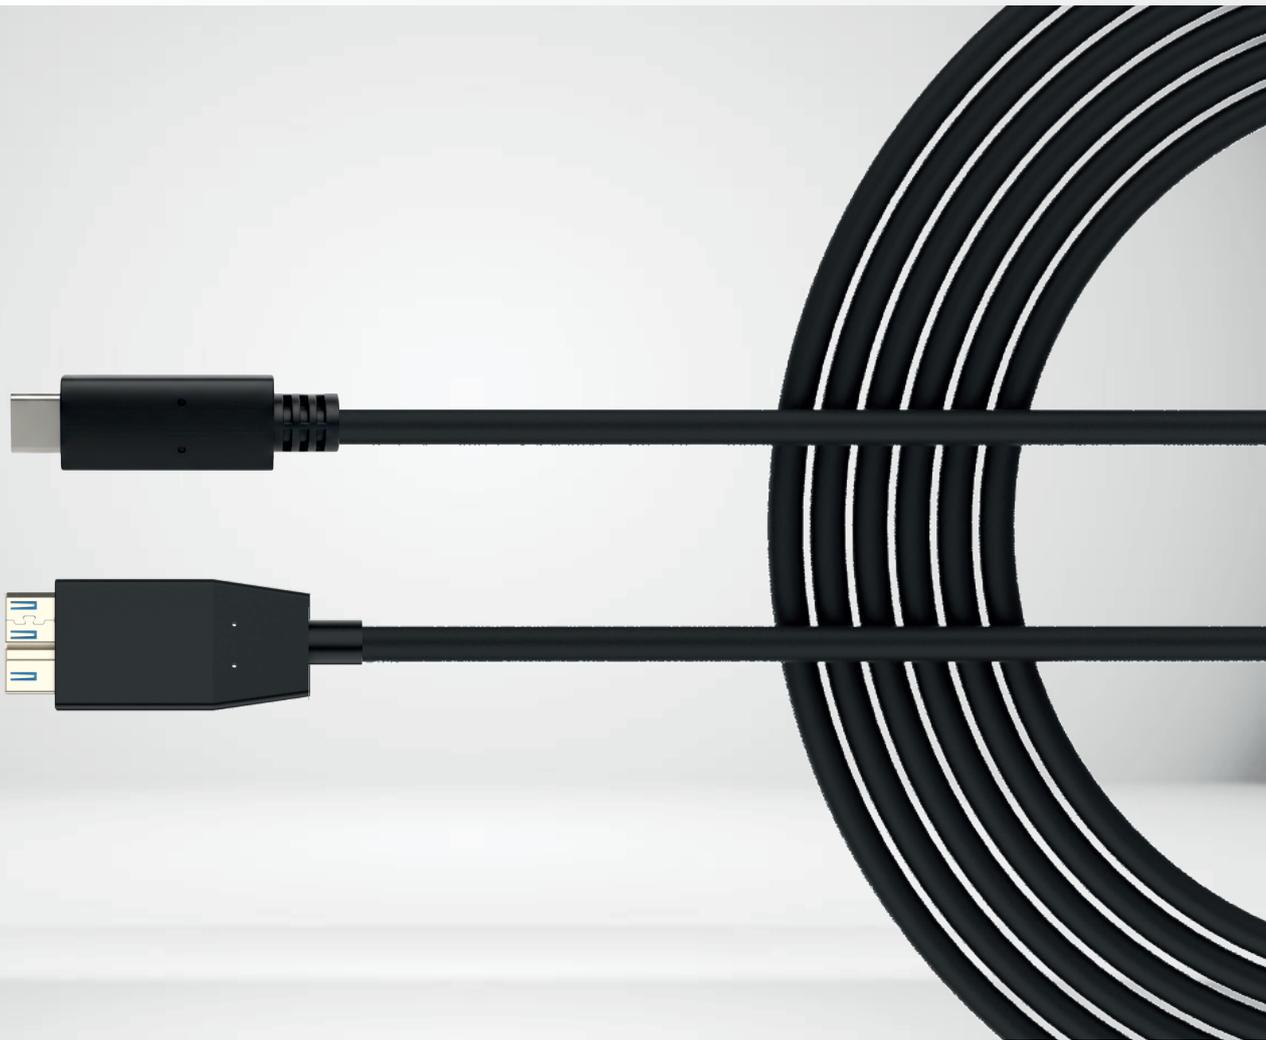

DESCRIPTION

USB 3.1 CM to MICRO B M is a data cable . The cable and the connector is fully shielded and the pins are gold coated . It supports data . The data speed supported up to 5 Gbps for 1 - 3 mtrs . The C port is connected to the host and Micro B m is to the devices - the Micro B male cannot be connected to the Host . The c connector is reversible . The cable is constructed with shielded twisted pairs and multi core wires and the gauge ranges from 26 to 34 awg . Available Lengths : 1 - 3 mtrs . Applications : VR , Power , Video conferencing , Docking

USB 3.1 CM TO MICRO BM CABLE


nT01BG05




nT
n - TECH SOLUTIONS
SOLUTIONS FOR GROWTH

Specification

Connector A	:	USB B M fully shielded
Housing	:	ABS + PVC Overmoulding
Coating	:	Nickel / Gold
Connector B	:	USB C M + PCB Full Shielded
Housing	:	ABS + PVC Overmoulding
Coating	:	Nickel / Gold
Connection type	:	Machine Soldering , Shield Crimping
Cable	:	Flexible - shielded twisted pair + twisted pair and multicore cable + al foil + drainwire + shield + pvc insulation
Gauge	:	26 34 Awg
Conductor	:	Tin coated copper
Speed	:	5 Gbps (1-3 m)
Version	:	USB 3.1 Backward compatible with USB 3.0 , USB 2.0 , USB 1.1
Host	:	USB C M
Slave	:	USB MICRO B M
Protection	:	EMI & RF Protection
Colour	:	Black
Length Available	:	1 - 3 mtrs

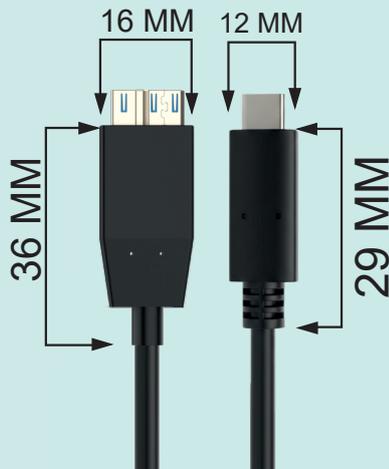

- * Supports Speed 5 Gbps (1 -3 m)
- * Connector is Nickel coated and pins are gold coated .

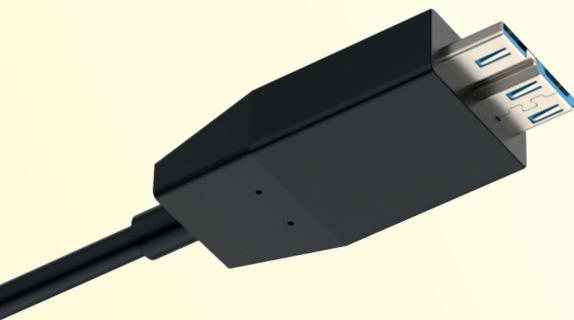

Shielding protects from EMI an RF Signals .
Available lengths - 1- 3 Mtrs

Webpage



Youtube

