

USB 2.0 CM TO CM CABLE

nT01BG06



nT
n - TECH SOLUTIONS
SOLUTIONS FOR GROWTH



DESCRIPTION

nT01BG06 USB 2.0 CM TO CM CABLE

USB 2.0 CM to CM is compliant with version 2.0 cable and is backward compatible with v 1.1 . The cable and the connector is fully shielded and the pins are gold coated. It supports Power and data .The cable supports 5V 3 A (15W) Power output . The data speed supported up to 480 mbps . The cable is used for charging and data sync . The cable is constructed with twisted pairs and multi core wires and the gauge ranges from 28 to 24 awg . Available Lengths : 1 - 4 mtrs . Applications : Power , Data transfer , Video conferencing , Docking...

USB 2.0 CM TO CM CABLE


nT01BG06



nT
n - TECH SOLUTIONS
SOLUTIONS FOR GROWTH


Specification

Connector A	:	USB C M + PCB Full Shielded
Housing	:	ABS + PVC Overmoulding
Coating	:	Nickel / Gold
Connector B	:	USB C M + PCB Full Shielded
Housing	:	ABS + PVC Overmoulding
Coating	:	Nickel / Gold
Connection Type	:	Machine Soldering , Shield Crimping
Cable	:	flexible - twisted pair and multicore cable + al foil + drainwire + shield + pvc insulation
Gauge	:	28 - 24 Awg
Conductor	:	Tin coated Copper
Speed	:	480 Mbps
Version	:	USB 2.0 Backward compatible with USB 1.1
Power	:	3A - 15 W
Protection	:	EMI & RF Protection
Colour	:	Black
Length Available	:	1 - 4 mtrs

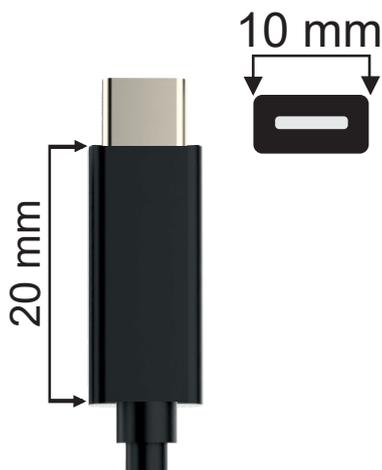

Power supported 5 V 3A (15 W)

Supports Speed 480 Mbps

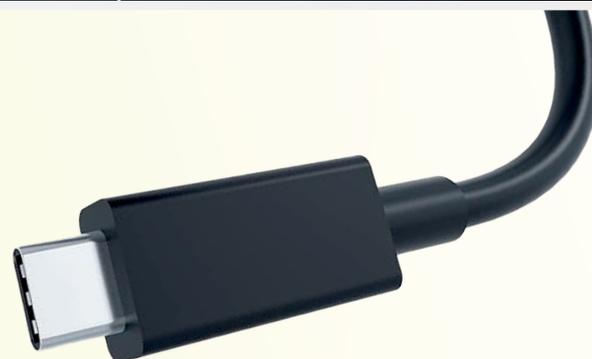

Connector is Nickel coated and pins are gold coated

Available Lengths - 1- 4 Mtrs

Webpage



Youtube

