


USB 2.0 CM TO MICRO B CABLE

nT01BG08



nT
n - TECH SOLUTIONS
SOLUTIONS FOR GROWTH

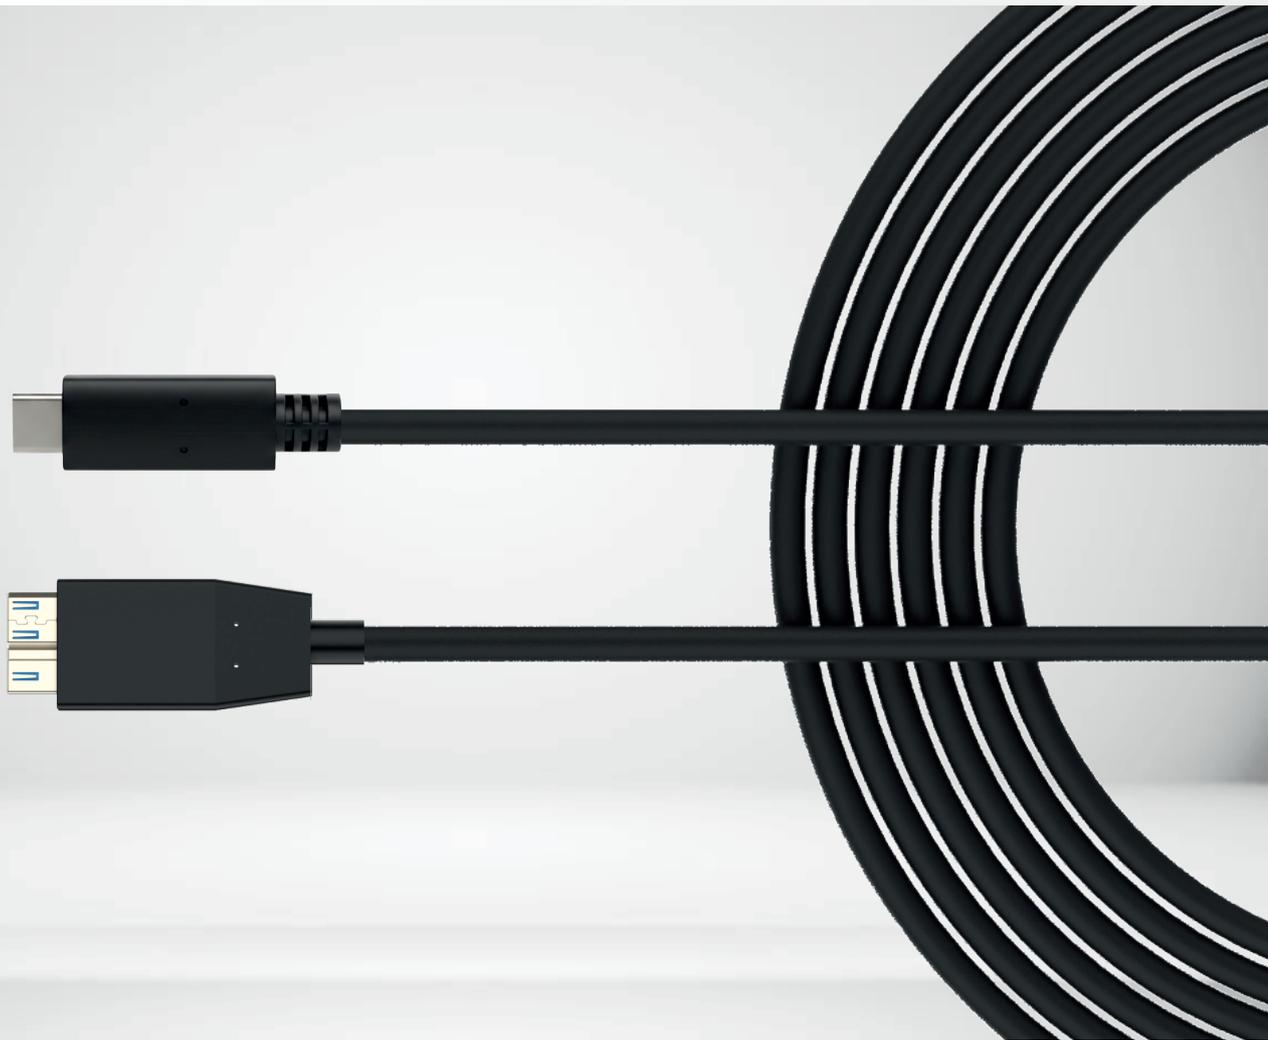

DESCRIPTION


USB 2.0 CM to MICRO B Cable is compliant with version 2.0 cable and is backward compatible with v 1.1. The cable and the connector is fully shielded and the pins are gold coated . It supports Power and data. The cable supports 5V 3 A (15W) Power output . The data speed supported up to 480 mbps . The cable is used for charging and data sync . The cable is constructed with twisted pairs and multi core wires and the gauge ranges from 28 to 24 awg . Available Lengths : 1 - 4 mtrs . Applications: Power,Data transfer ,Video conferencing , Docking

USB 2.0 CM TO MICRO B CABLE

nT01BG08




nT
n - TECH SOLUTIONS
SOLUTIONS FOR GROWTH

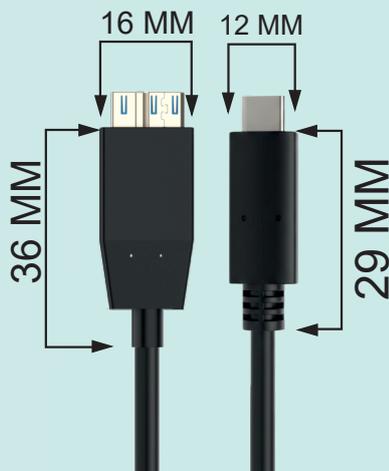

Specification

Connector A	: USB C M + PCB Full Shielded
Housing	: ABS + PVC Overmoulding
Coating	: Nickel / Gold
Connector B	: USB Micro B Full Shielded
Housing	: ABS + PVC Overmoulding
Coating	: Nickel / Gold
Connection type	: Machine Soldering , Shield Crimping
Cable	: Flexible - shielded twisted pair + twisted pair and multicore cable + al foil + drainwire + shield + pvc insulation
Gauge	: 28 - 24 Awg
Conductor	: Tin coated copper
Speed	: 480 Mbps
Version	: USB 2.0 Backward compatible with USB 1.1
Power	: 3A - 15 W
Protection	: EMI & RF Protection
Colour	: Black
Length Available	: 1 - 4 mtrs

- * Supports Speed 480 Mbps
- * Connector is Nickel coated and pins are gold coated .

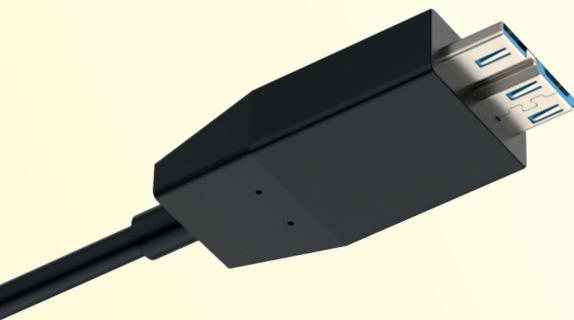

Shielding protects from EMI an RF Signals .
Available lengths - 1- 4 Mtrs

Webpage

Youtube

