


USB 2.0 CM TO USB AF CABLE

nT01BG10



nT
n - TECH SOLUTIONS
SOLUTIONS FOR GROWTH

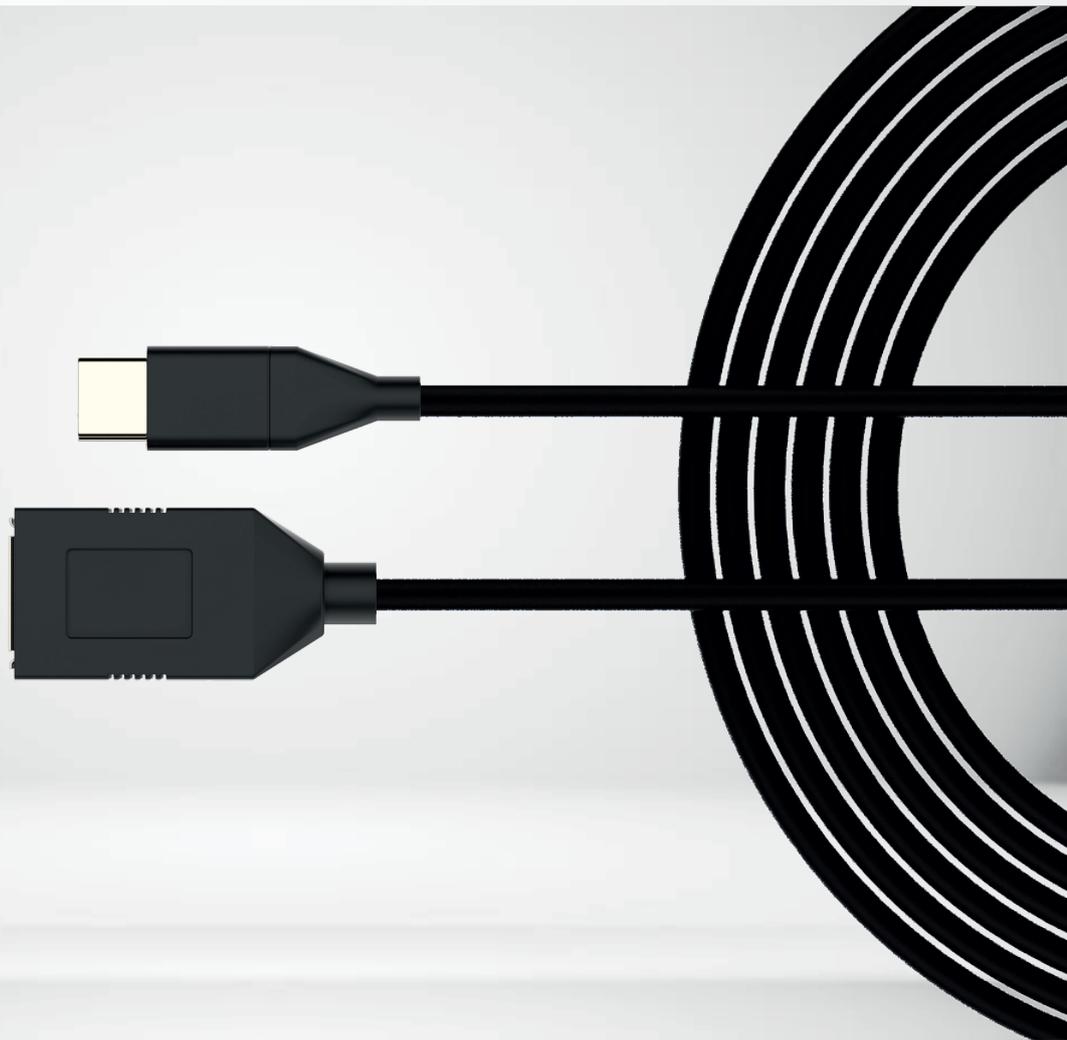

DESCRIPTION

nT01BG10 USB 2.0 CM TO USB AF CABLE


USB 2.0 CM to USB AF Cable is compliant with version 2.0 cable and is backward compatible with v 1.1 . The cable and the connector is fully shielded and the pins are gold coated . It supports Power and data . The cable supports 5V 3 A (15W) Power output . The data speed supported up to 480 mbps . The cable is used for charging and data sync .The cable is constructed with twisted pairs and multi core wires and the gauge ranges from 28 to 24 awg . Available Lengths : 1 - 4 mtrs . Applications : Power , Data transfer , Video conferencing, Docking....

USB 2.0 CM TO USB AF CABLE


nT01BG10



Specification

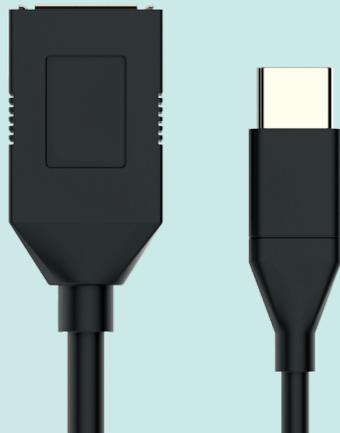

Connector A	:	USB C M + PCB Full Shielded
Housing	:	ABS + PVC Overmoulding
Coating	:	Nickel / Gold
Connector B	:	USB A F Full Shielded
Housing	:	ABS + PVC Overmoulding
Coating	:	Nickel / Gold
Connection type	:	Machine Soldering , Shield Crimping
Cable	:	flexible - shielded twisted pair + twisted pair and multicore cable + al foil + drainwire + shield + pvc insulation
Gauge	:	28 - 24 Awg
Conductor	:	Tin coated copper
Speed	:	480 Mbps
Version	:	USB 2.0 Backward compatible with USB 1.1
Power	:	3a - 15w
Protection	:	EMI & RF Protection
Colour	:	Black
Length Available	:	1 - 4 Mtrs

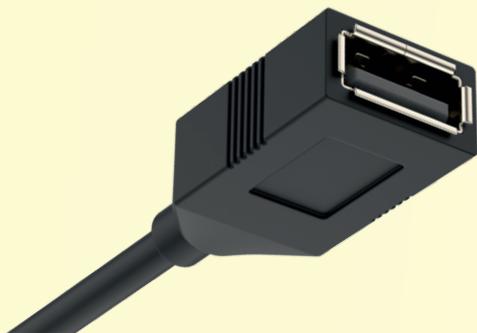


* Supports Speed 480 Mbps

* Power supported 5 V 3A (15 W)



Shielding protects from EMI an RF Signals

Available lengths 1 mtrs to 3 mtrs,

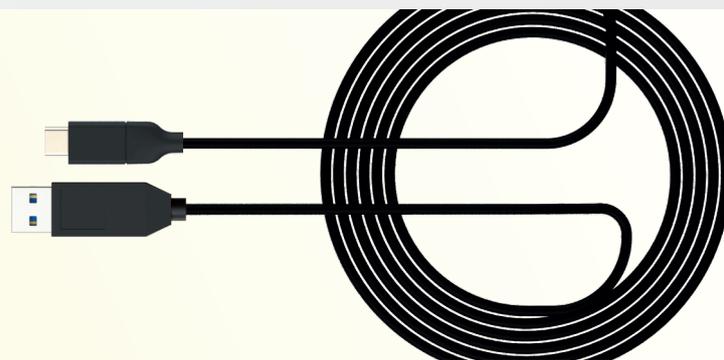

Webpage

Youtube

