


USB 1.1 AM TO USB AM CABLE

nT 01BH03



nT
n - TECH SOLUTIONS
SOLUTIONS FOR GROWTH

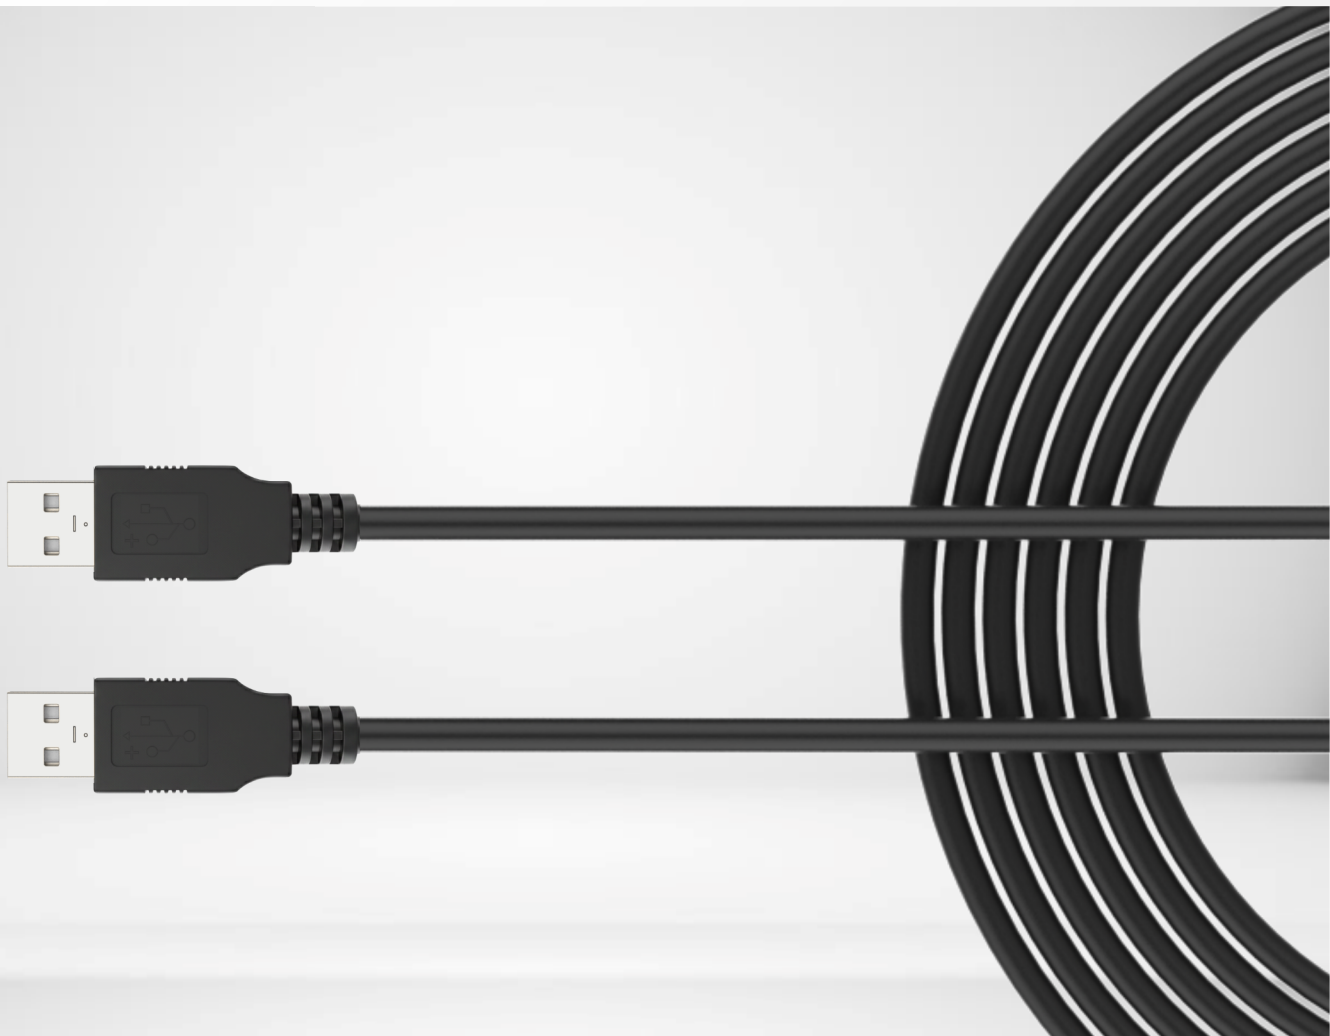

DESCRIPTION

nT 01BH03 USB 1.1 AM TO USB AM CABLE

USB 1.1 AM to USB AM Cables are made up of fully shielded connectors and cables . USB cable is made up of 1 twisted pair for data and 2 c for power delivery and al foil + drain wire + pvc jacket . The conductor is tinned coated copper and the gauge of the conductor is 28 AWG . The USB 1.1 cable support Full Speed -and supports 12 Mbps . The connectors have full shell inside the mould to avoid rf and emi losses and also to avoid physical damages due to twists and plugging and unplugging . The cable is used for various applications like printer human interface devices , scanners , camera Available in lengths from 1.5 to 5 Mtrs .

USB 1.1 AM TO USB AM CABLE


nT 01BH03



nT
n - TECH SOLUTIONS
SOLUTIONS FOR GROWTH


Specification

Connector A	:	USB AM Full Shielded
Housing	:	Metal Shell + ABS + pvc Overmoulding
Coating	:	Nickel/Gold
Connector B	:	USB AM Full Shielded
Housing	:	Metal Shell + ABS + PVC Overmoulding
Coating	:	Nickel /Gold
Connection Type	:	Machine Soldering , Shield Crimping
Cable	:	twisted pair + 2 c + al foil + drain wire + pvc
Gauge	:	28 AWG
Conductor	:	Tin coated copper
Speed	:	12 Mbps
Protection	:	EMI & RF Protection
Colour	:	Black
Length Available	:	1.5 - 5 mtrs

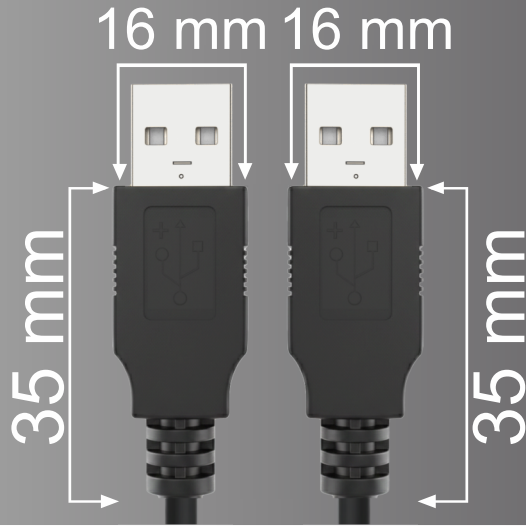

Connector is Nickel coated and pins are gold coated

Supports Full Speed USB 12 Mbps Speed

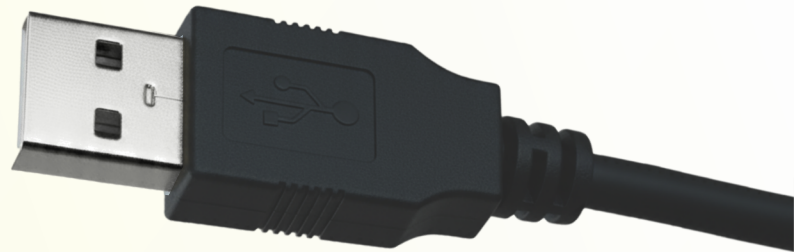

Shielding protects from EMI and RF Signals .

Available Lengths - 1.5 - 5 Mtrs



Webpage

Youtube

