


# USB 2.0 AM TO USB AF CABLE

nT 01BH05



**nT**  
n - TECH SOLUTIONS  
SOLUTIONS FOR GROWTH

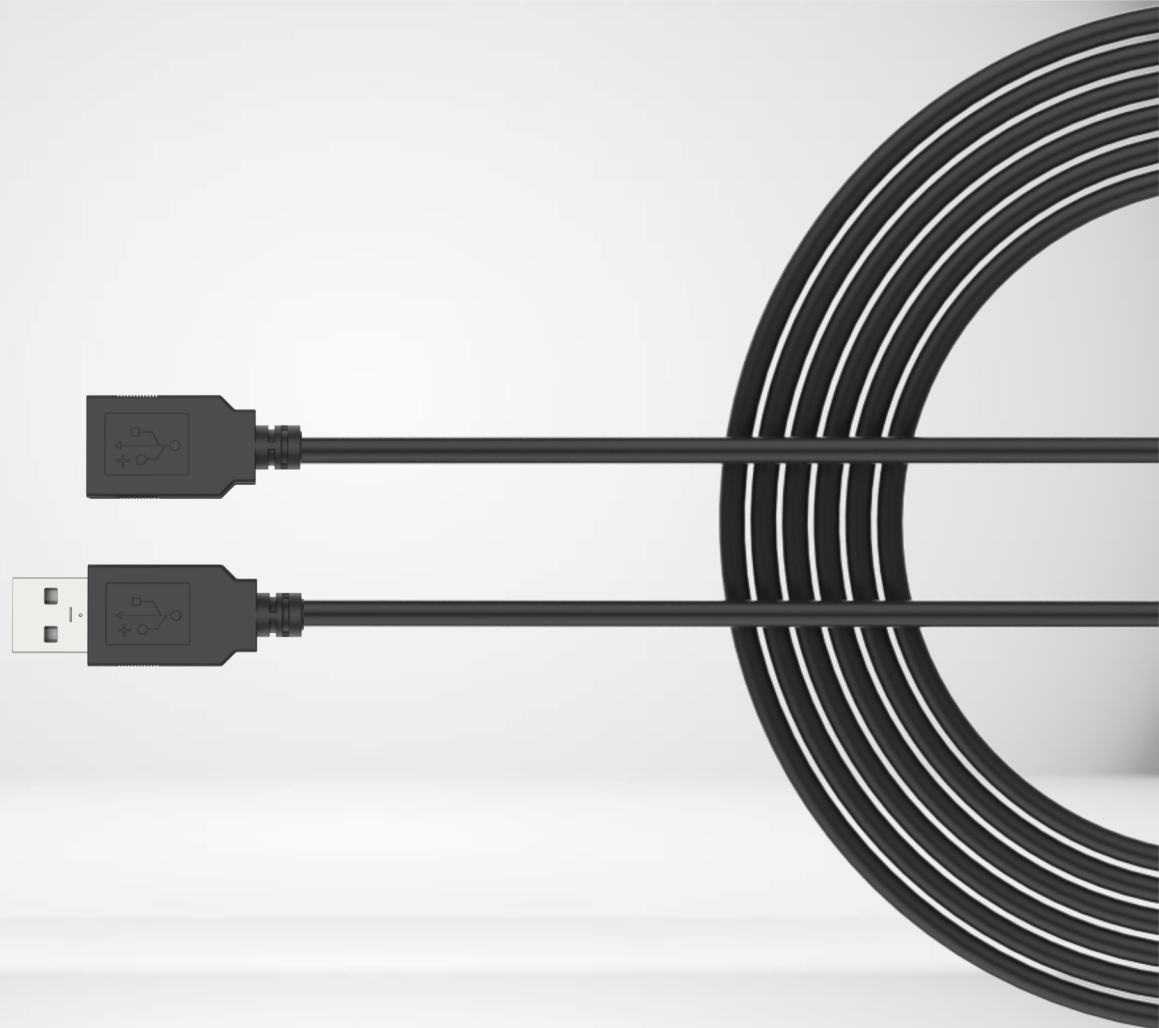

## DESCRIPTION

### 1BH05 USB 2.0 AM TO USB AF CABLE

Usb 2.0 AM to Usb AF Cables are made up of fully shielded connectors and cables. Usb cable is made up of 1 twisted pair for data and 2 c for power delivery and al foil + drain wire + Shield + pvc jacket . The conductor is tinned coated copper and the gauge of the conductor is 28 / 24 / 20 AWG .The USB 2.0 cable support High Speed - and supports 480 Mbps speed . The connectors have full shell inside the mould to avoid rf and emi loss and also to avoid physical damages due to twists and plugging and unplugging . The cable is used for various applications like printer , human interface devices , scanners , camera ..... Available in lengths from 1.5 to 5 Mtrs .

# USB 2.0 AM TO USB AF CABLE


nT 01BH05



**nT**  
n - TECH SOLUTIONS  
SOLUTIONS FOR GROWTH


## Specification

Connector A	:	USB AM Full Shielded
Housing	:	Metal Shell + ABS + pvc Overmoulding
Coating	:	Nickel/Gold
Connector B	:	USB AF Full Shielded
Housing	:	Metal Shell + ABS + PVC Overmoulding
Coating	:	Nickel /Gold
Connection Type	:	Machine Soldering , Shield Crimping
Cable	:	twisted pair + 2 c + al foil + drain wire +Shield + pvc
Gauge	:	28 /24 / 20 Awg
Conductor	:	Tin coated copper
Speed	:	480 Mbps
Protection	:	EMI & RF Protection
Colour	:	Black
Length Available	:	1.5 - 5 mtrs

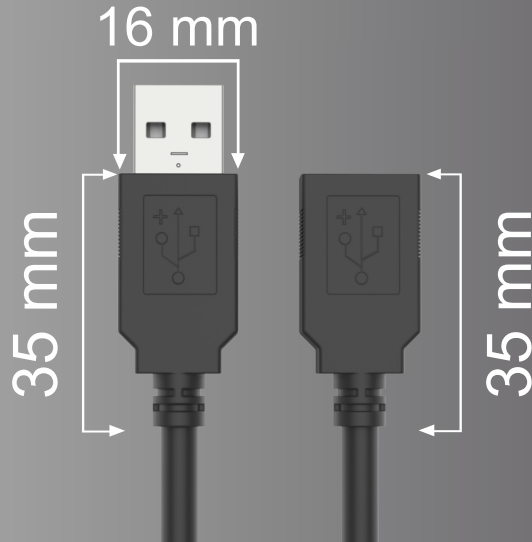

**Supports High Speed USB 480 Mbps Speed**

**Connector is Nickel coated and pins are gold coated**

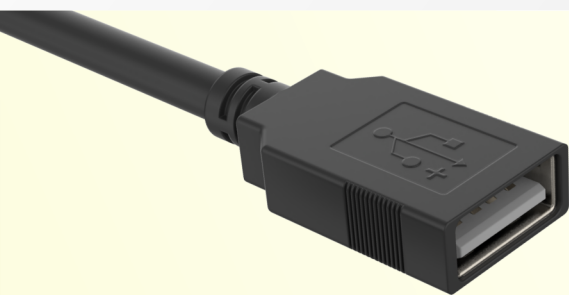

**Shielding protects from EMI and RF Signals**

Webpage



Youtube

