

USB 2.0 AM TO USB AF P.M CABLE

nT 01BH09



DESCRIPTION

1BH09 USB 2.0 AM TO USB A F P.M CABLE

USB 2.0 AM to USB A F P.M Cables are made up of fully shielded connectors and cables . USB cable is made up of 1 twisted pair for data and 2c for power delivery and al foil + drain wire + Shield + pvc jacket .The conductor is tinned coated copper and the gauge of the conductor is 28 / 24 / 20 AWG . The USB 2.0 cable support High Speed - and supports 480 Mbps speed . The connectors have full shell inside the mould to avoid rf and emi losses and also to avoid physical damages due to twists and plugging and unplugging .The USB A and emi losses and also to avoid physical damages due to twists and plugging and unplugging . The USB human interface devices, scanners , camera Available in lengths from 1.5 to 5 Mtrs .

USB 2.0 AM TO USB AF P.M CABLE

nT 01BH09



nT
n - TECH SOLUTIONS
SOLUTIONS FOR GROWTH


Specification

Connector A	:	USB AM Full Shielded
Housing	:	Metal Shell + ABS + pvc Overmoulding
Coating	:	Nickel/Gold
Connector B	:	USB A Female Panel Mount Full Shielded
Housing	:	Metal Shell + ABS + PVC Overmoulding
Coating	:	Nickel /Gold
Connection Type	:	Machine Soldering , Shield Crimping
Cable	:	twisted pair + 2 c + al foil + drain wire +Shield + pvc
Gauge	:	28 /24 / 20 Awg
Conductor	:	Tin coated copper Connection
Speed	:	480 Mbps
Protection	:	EMI & RF Protection
Colour	:	Black
Length Available	:	1.5 - 5 mtrs



**Supports High Speed USB
480 Mbps Speed**

**Connector is Nickel coated and
pins are gold coated .**

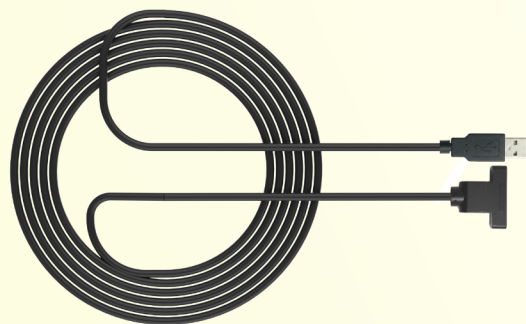

Shielding protects from EMI and RF Signals

Webpage



Youtube

