

6G SDI MINI (59) COAX CABLE

nT02AC01A



nT
n - TECH SOLUTIONS
SOLUTIONS FOR GROWTH



DESCRIPTION


nT02AC01A is a 6G SDI (Serial Digital Interface) Mini Coax Single st cable - it is a professional- grade coaxial cables used for transmitting uncompressed digital video and audio signals. SDI Mini Coax Cable is a digital 75 ohms coaxial cable and it can carry HD and UHD signals for longer lengths up to 40 mtrs. The center conductor is single strand 23 awg - 0.60 mm copper and the shield is tin coated copper 100 % coverage with aluminium foil above the foam. The outer insulation is CM rated - making it suitable for multipurpose applications like in wall , open , in rack etc. The cable supports speeds up to 6 G signals. The cable is available in black colour and is packed in easy pull boxes of 300 mtrs . Application- studio , broad case , medical , events , education

6G SDI MINI (59) COAX CABLE

nT02AC01A




nT
n - TECH SOLUTIONS
SOLUTIONS FOR GROWTH

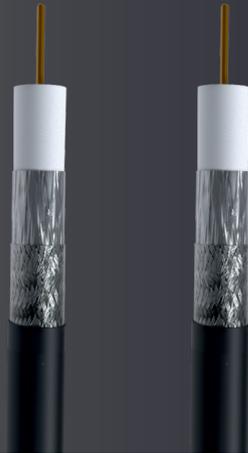


Specification

Center Conductor	:	1 x 0.60 mm (23 Awg) Bare copper,
Dielectric	:	Gas Injected foam PE 2.95mm ,
Foil Shield	:	AL Laminated tape - 100% coverage
Braid Shield	:	Tinned copper 100%
Cable Jacket -		
Insulation	:	PVC - Black - 4.60 mm
Operating Temperature	:	- 30°C to 60°C
Impedance	:	75Ω
Capacitance	:	55pF/m Nom
Signal Supported	:	6 G
Distance Supported	:	6 G -40 mtrs
Packaging	:	Easy Pull 305 m Box
Colour	:	Black
Suitable BNC Connector	:	nT4BX02 - 360

6G SIGNAL SUPPORTED

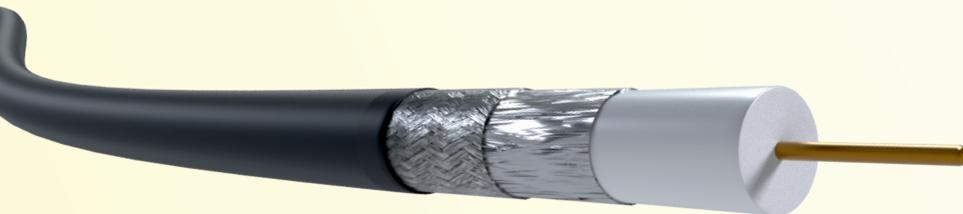

Cross Section

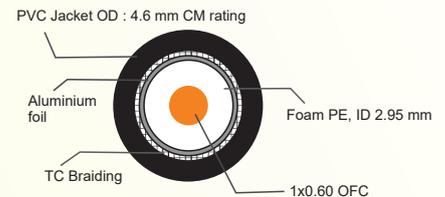

Webpage



Youtube

