


Audio Cable 2+1

nT02BB05



nT
n - TECH SOLUTIONS
SOLUTIONS FOR GROWTH

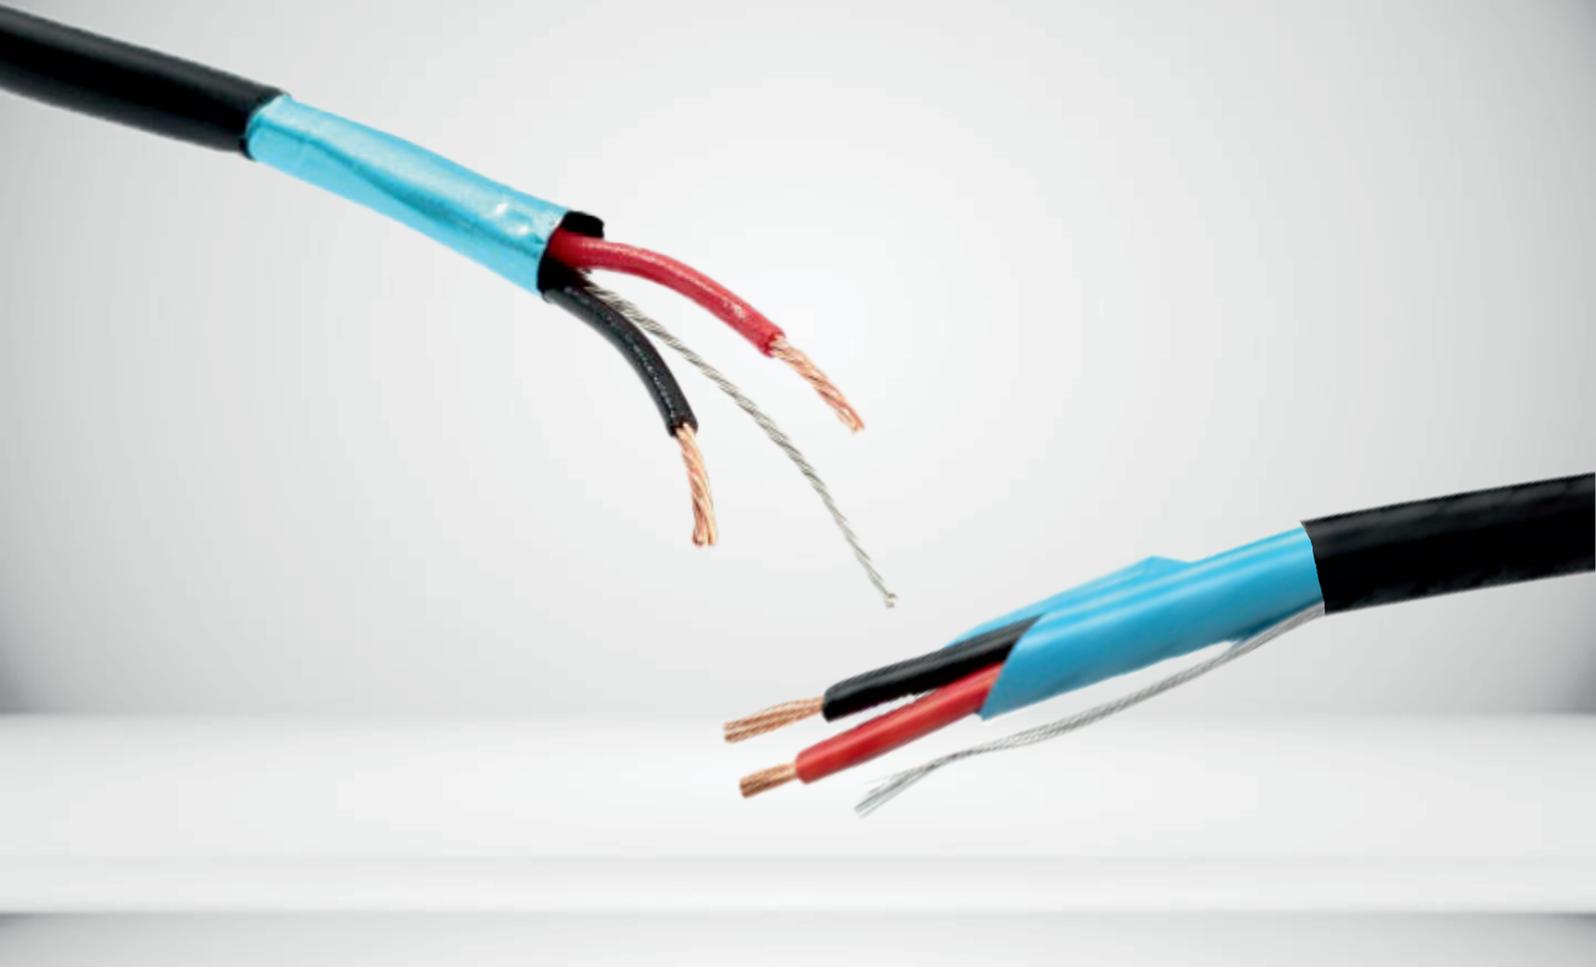

DESCRIPTION

Audio cable slim 24 Awg is a digital / Analog Audio cable – the cable is 100 % shielded with aluminium Foil - to avoid all the external disturbance and emi / rf interference . The cable is made up of 1 pair (2c) of 24 awg cable and a 100 % aluminium shield coverage and a drain wire –Each core has 7 strands of 0.254 mm annealed OFC Copper- with a insulation of Foamed PE .High number of strands and OFC annealed copper makes the cable more flexible and adds ease in making connections and soldering . The slim construction makes the cable best suitable for patch cables , in rack connectivity . The cable has meter marking at every meter for easy length calculations . Available in black colour. The cable is best suited for Auditoriums , studios, recording studio , stage shows and events .

Audio Cable 2+1

nT02BB05




nT
n - TECH SOLUTIONS
SOLUTIONS FOR GROWTH




Specification

Conductor	:	Annealed OFC Tinned Copper
Conductor Gauge	:	2 c - 7 x 0.254 mm (24 awg)
Cable Shape	:	Round
Insulation	:	PE - Red /Black -1.3 mm
Shield	:	AL Foil + Annealed OFC Tinned Copper 7 x 0.20 mm - drain wire
Cable OD	:	PVC - 3.6 MM
Cond Ohm/km	:	52.1 ohm
Conductivity	:	98 %
Current A	:	12
Inductance	:	1.5114 uH/m
Capacitance	:	151.6347 Pf/m
Packaging	:	300 M easy pull Boxx
Colour	:	Black

**Cl3 flame resistant Rated Jacket
suitable for In wall insta+F1115llations**

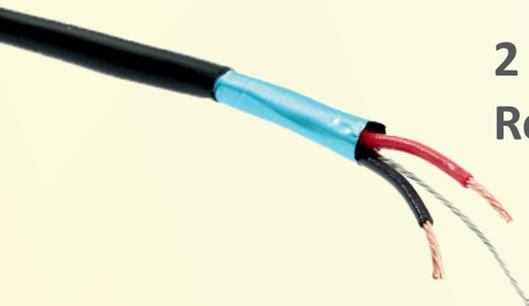

**2 c identification by Colour
Red and Black Insulation**

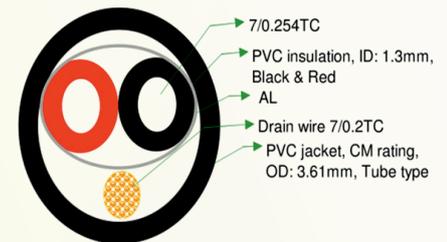

Webpage



Youtube

