


SPEAKER CABLE

nT02BC01



nT
n - TECH SOLUTIONS
SOLUTIONS FOR GROWTH

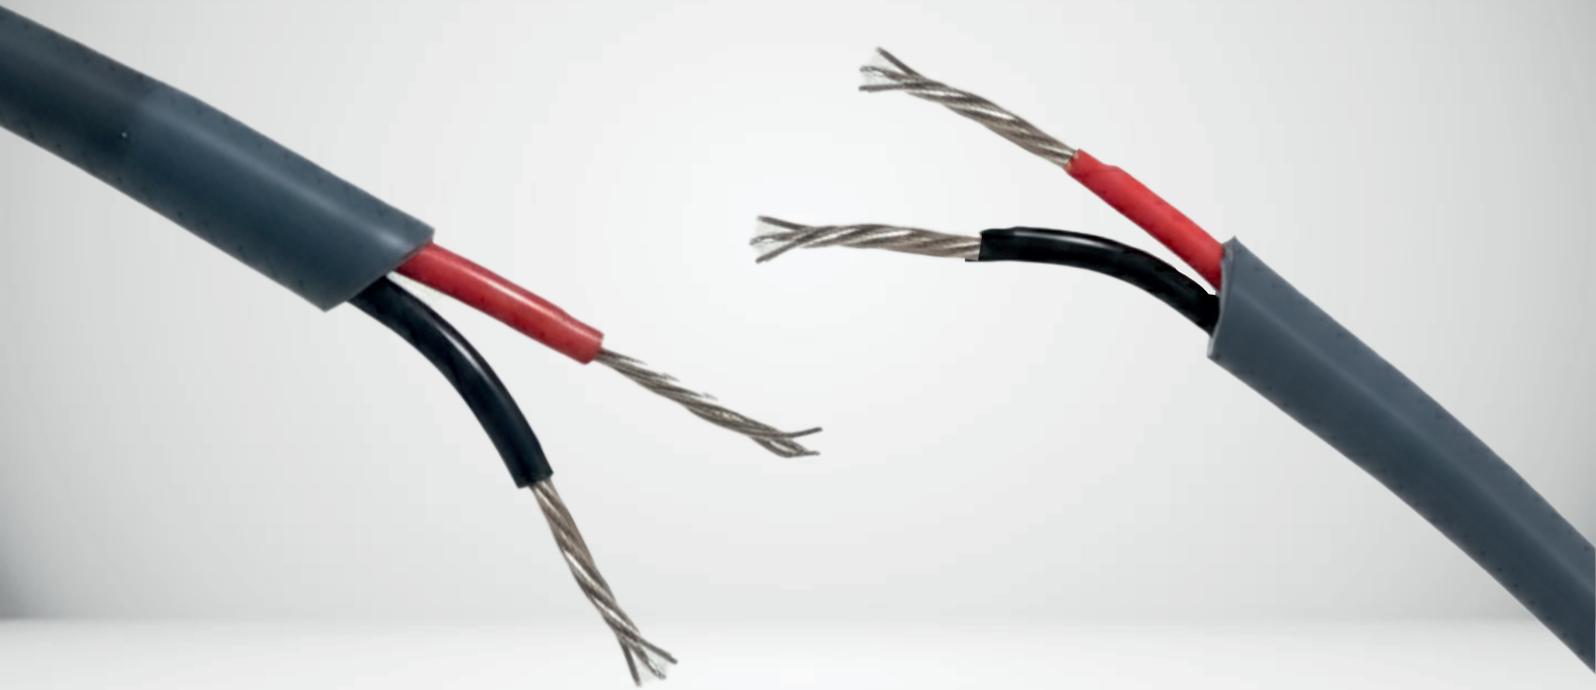

DESCRIPTION

nT02BC01 is a round installation 20 awg speaker cable . Made up of annealed oxygen free tin coated copper wires- 7 strands of 0.32 mm tc . The conductors are identified positive and negative by black and red insulation. with annealed and ofc copper strands and low resistance the cable is best suitable for hi end audio installations. The cable is characterised by high flexibility and increased transmission parameters . In order to offer uniform capacitance throughout length the distance between the two conductors is maintained uniformly .Meter marking is provided at every meter . cable can be installed in channels , cable trays or in plaster . Colour light grey .

SPEAKER CABLE

nT02BC01




nT
n - TECH SOLUTIONS
SOLUTIONS FOR GROWTH



Specification

Conductor	:	Annealed Tin coated Copper
Conductor Gauge	:	2 c - 7 x 0.32 mm
Cable Shape	:	Round
Insulation	:	PVC - Red / Black -1.65 mm,(0.33 mm thick)
Cable OD	:	4.6 MM (0.95mm Thick)
Cond Ohm/km	:	32.4 ohm
Conductivity	:	98 %
Current A	:	16
Rated Voltage	:	300 V
Inductance	:	1.441- μ H/M
Capacitance	:	66.2824 pF/M
Packaging	:	300 M easy pull Boxx
Colour	:	Light Grey

CM fire resistance Rated Jacket
suitable for In wall installations

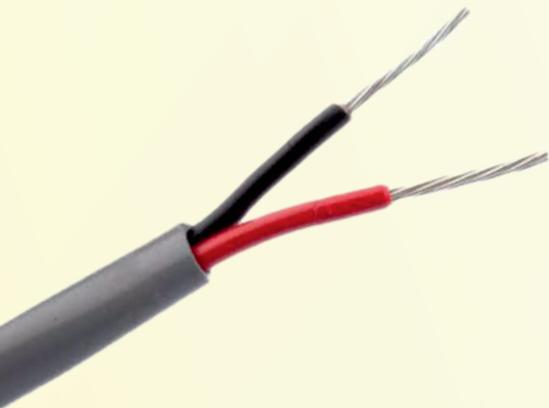

Positive and Negative identification by
Colour Black and Red Insulation

Webpage



Youtube

