



DESCRIPTION

nT03BX08 DP TO HDMI Pigtail

DP to HDMI Pigtail converts DP signal into HDMI video and audio signals . It helps to connect HDMI display or projectors to the latest DP interface of the sources like laptop , computers etc .. .Supports Ultra HD (UHD) 4K 60Hz (3840x2160) & 1920x1200 (1080p) video, 7.1ch Audio , HDCP 1.4 The pigtail dose not support bi directional use . This is a active pigtail - it supports DP++ , ATI Eyefinity , enables multi screen extensions . It is provided with anti theft tie hole – so that it can be tied to the display cable – avoiding misplacement and theft . Used for AV Integrations , pro audio like Auditorium , meeting room , class rooms , hospitals , studio...

DP TO HDMI PIGTAIL

nT 03BX08




Specification



Connector A	:	DP male - input
Connector B	:	HDMI female - output
Length	:	End to End 190 mm
Resolution	:	Ultra HD (UHD) 4K 30Hz (3840 x 2160) & 1920 x 1200/1080p60Hz
Conversion Type	:	Active
Multi Monitor Setup	:	Supported
Supports	:	DP++ , ATI Eyefinity , Multi display setup
Tie hole	:	OD 3 mm
Output Cable length supported :	:	HDMI Output can support lengths up to 10 mtrs
Colour	:	Ral 500B (Blur / Black)

**Supports resolutions Ultra HD (UHD)
4K 30Hz (3840x2160) & 1920x1200 (1080p)**

Active conversion Pigtail

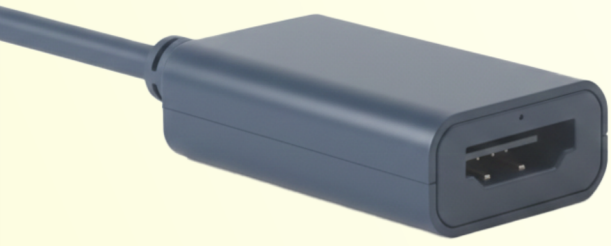

**Works with DP++ , ATI Eyefinity ,
multi display application**

DVI output can support cables up to 10 mtrs

Webpage



Youtube

