



## DESCRIPTION

### nT03BX17 Mini DP M To DP F Pigtail

Mini DP M To DP F Pigtail is designed for high-performance connectivity. Mini DP male on side A and, DP female on side B, Used to convert DP to Mini DP, It enables to connect a DP male cable to Mini DP Source or device. Outer Housing Material - PVC Moulded, Dual Moulding - inner and Outer for better strength, Total length 190 mm including connector, cable is made up of 30 awg twisted differential pairs. Pigtail enables flexibility and ease to connect DP Cables in tight spaces, it also protects Mini DP port. Also available in DP F Panel mount option. Pin material - phosphor bronze, Plating: Gold plated. Ensures reliability and durability for various applications. Supported resolution 4K x 2K (3840x2400p 60Hz), 21.6 Gbps bandwidth, HBR2, 8Ch Audio, Multi-Stream Transport (MST) & 3D Stereo (2560x1600p 120Hz) HDCP, EDID, 3D. Used for AV Integrations pro audio like Auditorium, meeting room, class rooms, hospitals, studio .....

# MINI DP M TO DP F PIGTAIL

## nT03BX17




### Specification

Connector A	:	DP Female or optional DP Female panel Mount
Connector B	:	Mini DP male
Housing	:	Dual Moulding PVC
Connector Pins	:	Phosphor Bronze
Plating of pins	:	Gold Plating
Resolutions Supported	:	4k60 Hz
Panel Mounting Screws	:	Star m3 -15 mm - optional
Length	:	190 mm
Cable Gauge	:	Differential Pair - 30 awg
Bandwidth	:	21.6 Gbps
Supports	:	HBR2 ,8Ch Audio , multi-stream Transport (MST) & 3D Stereo ( 2560 x 1600p 120Hz ) HDCP , EDID , 3D
Colour	:	RAL 5008 / Blue

**Resolution Supported 4K 60 Hz**

**Rugged Design and construction for longer life**

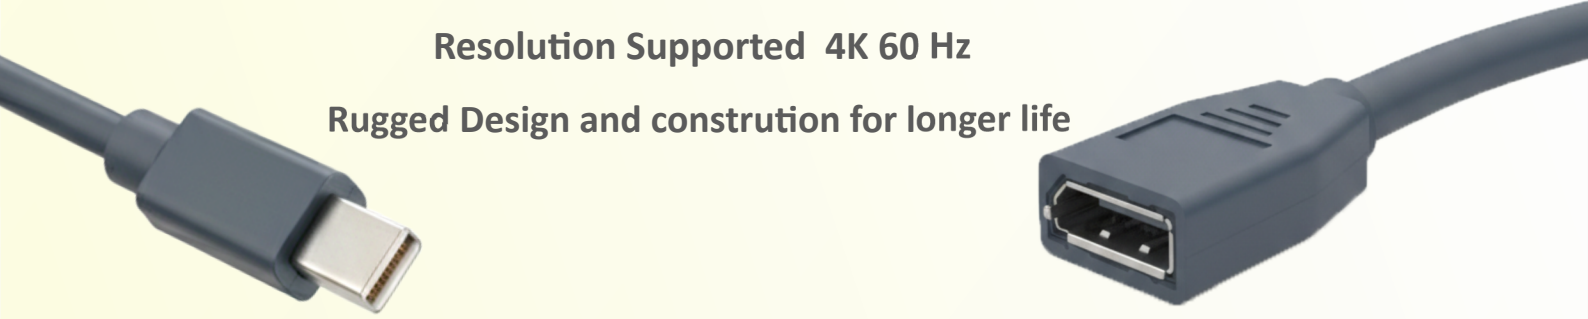

**Bi-directional**

**Supports 21.6 Gbps bandwidth**

Webpage

Youtube

