


28-GAUGE

DESCRIPTION

nT02BB03 Mic cable is a flexible balance audio cable with 1 twisted pair + shield . Each pair is made of 2 wires twisted together marked red and blue and the conductor is annealed fine copper strands of 28 awg (10c x0.10mm) . The shield is spiralled around the twisted pairs - the shield is made up of fine strands (40 * 0.10) . The overall insulation of flexible pvc is of od 3.50mm - - slim enough for loop wires and in rack integrations . The cable is well suited for audio system integrations like auditorium , studio , education , medical , events

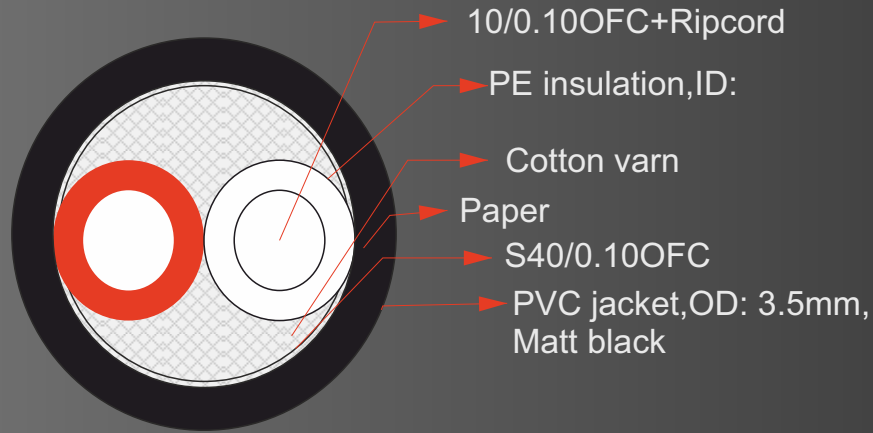

MANUFACTURE STANDARD

Proceeding	Description/Color	Material	Thickness	OD	Shape	Cond ohm/m	Electronic conductivity	Tension KG	Current A	Reated Voltage
Conductor	100.10mm±0.01	OFC				235.2 Ω	98%	2	5	
Filler-1		Ripoord								
Insulation	Red,Black	PE	0.34mm	1.5mm±0.2	Round					
Filler-2		Cotton yam								
Shielding-1		Paper								
Shielding-2	400.10mm±0.1	OFC								
Jacket	Matt Black	PVC	0.73mm	3.5mm±0.2	Round					300V
Printing	Yes									
Printing Contents	nT2CAD001									

SPECIFICATION

Length	:	500Meters,Minimum	Q'ty/Carton	:	1 Spool
Spool size	:	PK-300x150x160x6mm	Net Weight	:	10.0 Kgs
Spool sticker	:	NO	Gross Weight	:	11.0 Kgs
Blister	:	NO	Measure	:	0.66'

Webpage



Youtube

