

DESCRIPTION

nT03AX14 Micro HDMI to VGA Pigtail converts digital mini HDMI signal into analog VGA video. It helps to connect traditional vga display or projectors to the latest Micro Hdmi interface of the sources like laptop , computers , Camera etc . It also eXtracts audio output from the hdmi to stereo 3.5 mm . If the HDMI Sources can't supply enough power, you can connect your power adapter or computer to the Micro USB female for power .Supports HDCP 1.2.Supports 165MHz/1.65Gbps per channel (6.75Gbps all channel) bandwidth for HDMI Input. Supports Analogue resolution up to UXGA and 1080p with 10-bit DAC .It is provided with anti theft tie hole - so that it can be tied to the display cable - avoiding misplacement and theft . Application presentation , desktops , laptop , display , projector interface conversion .

HDMI micro male input , VGA female and stereo 3.5 mm female output , USB micro b for power if required (5v 1 a) ,length of the pigtail end to end -190 mm , support analog resolutions from UXGA to 1080 p ,HDCP compliant , bandwidth 165mhz/1.65gbps per channel (6.75gbps all channel) for HDMI input , HDMI input can take cables up to 15 m , anti theft tie hole of 3 mm OD provided , colour ral 5008 - blue black colour .




SPECIFICATION

Input connector	:	Micro HDMI male
Out put video connector	:	VGA Female
Output audio	:	Stereo female
Power	:	USB micro
Length	:	End to end 190 mm
Resolution	:	Up to UXGA to 1080 p
Bandwidth	:	165mhz/1.65Gbps per channel (6.75gbps all channel)
Tie hole OD	:	3 mm
VGA output	:	Can support lengths up to 15 m
Colour	:	Ral 5008 (blue-black)


MICRO HDMI

Source

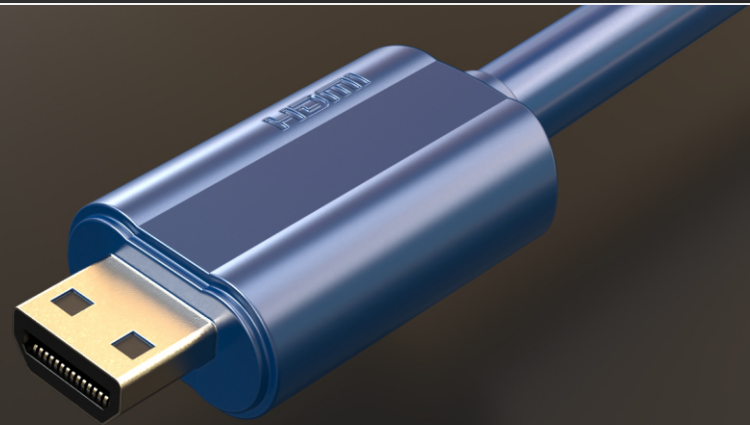

VGA

Output

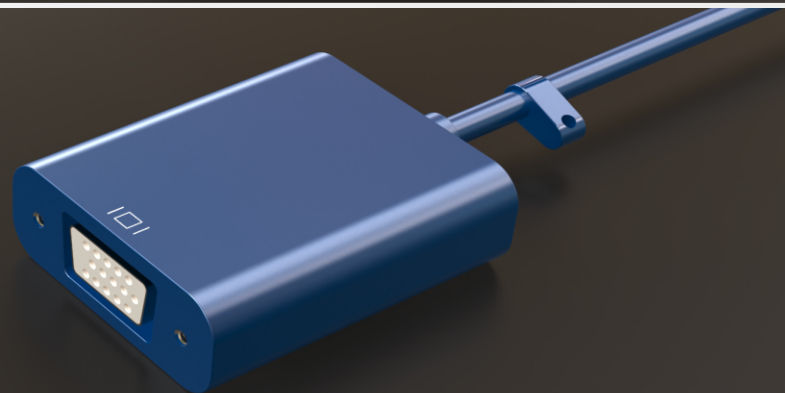

Webpage



Youtube

