

HDMI TO USB C PIGTAIL

nT03DX23



DESCRIPTION

nT03DX23 HDMI TO USB C Pigtail


HDMI to USB C Pigtail converts HDMI signal into SUB C video and audio signals . It helps to connect USB C display or devices to the hdmi sources. Supports 4096x2160 - 60 Hz - 4:4:4/1920x1200(1080p) video. It is provided with anti theft tie hole – so that it can be tied to the display cable – avoiding misplacement and theft . Available in 190 mm length . Used for AV Integrations , pro audio like Auditorium ,meeting room , classrooms, hospitals , studio

HDMI TO USB C PIGTAIL

nT03DX23



Specification

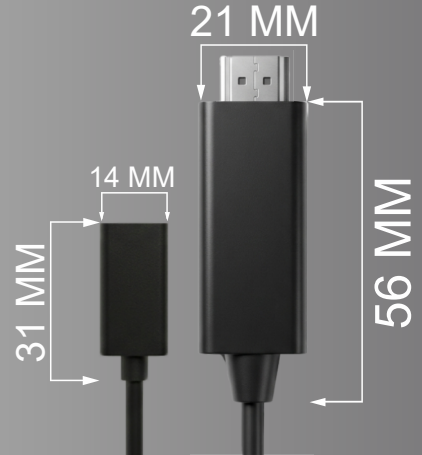

Connector A	:	HDMI MALE - input
Connector B	:	USB C Female - output
Length	:	End to End 190 mm
Resolution	:	4k x 2K @60Hz for 4:4:4
Conversion Type	:	Active
Supports	:	HDCP 1.4/2.2/dp 1.2 / SCDC / HOT PLUG
Colour	:	8 Bit colour depth
speed	:	four lanes with 1.62Gbps (RBR),2.7Gbps (HBR) or 5.4 Gbps (HBR2) Data per lane
Tie Hole	:	OD 3 mm
Output Cable Length Supported:	:	USB C2 Mtrs
Colour	:	Black



Support Resolution up to 4Kx2K@60Hz
Support DP 1.2 specification

Support Status and Control Data Channel (SCDC)

Hot Plug Detection



Webpage

Youtube

