

## 4 - IN - 1 Presentation Switch

### DESCRIPTION

**nT14AX01 BYOD multi input switcher is 4K switcher featuring Usb type C, HDMI, DisplayPort and Mini DisplayPort inputs** which are automatically converted to a standard HDMI format for use with projectors or displays. This unit provides easy switching functionality with both a manual input selection button and auto-switching feature which can automatically switch to a newly connected source. This switcher is must for all the presentation and meetings – which can take up all the sources and give output to HDMI display. Available in various mounting options (under the table, on the table, flush table mount, on the panel). A handy device easy to carry and store.

**Byod multi input switcher has 4 inputs - USB C (up to 1 mtrs), HDMI (up to 10 mtrs), Mini DisplayPort (up to 2 mtrs), DisplayPort (up to 5 mtrs) and 1 Hdmi output - (up to 15 mtrs).** Supports resolution up to 4k2k. It supports Auto / Manual switching with led indication for source selection. Power : USB C DC 5V 1 A. , Optional Mounting : Under the table / On the table / Flush table mount .



## Specification

Input	: 4 input(USb C/HDMI/MINI DP/DP)
Output	: 1 HDMI
Switching	: Manual/Auto
Power	: DC 5V 1A(USB C)
Mounting	: under table/on table/ flush mount
Housing	: Aluminium/Plastic
Color	: Silver
LED indication	: For power/For source indication




Switching  
Auto / Manual

**BOTTOM  
OF THE TABLE**



**FLUSH  
MOUNTING**

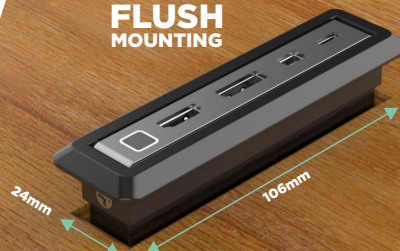

**ABOVE  
THE TABLE**



Webpage



Youtube

