



22-GAUGE

DESCRIPTION

nT02BB01 Mic cable 22 awg is a heavy duty Microphone balanced audio cable with 1 twisted pair + shielding . Each pair is made of 2 wires twisted together blue and white colour - the conductor used is fine annealed tin coated copper of 22 awg (60x0.08mm) .The insulation of the pair is made of pe materials which makes it to withstand higher temperature during the soldering - it also avoids signal interference . The pairs are then shielded with heavy shielding of Tin coated copper . The overall insulation of flexible pvc is of od 6.50 mm - .The cable is well suited for audio system integrations like auditorium , studio , education , medical , events and rentals

22-GAUGE MICROPHONE CABLE 100 METERS

nT02BB01

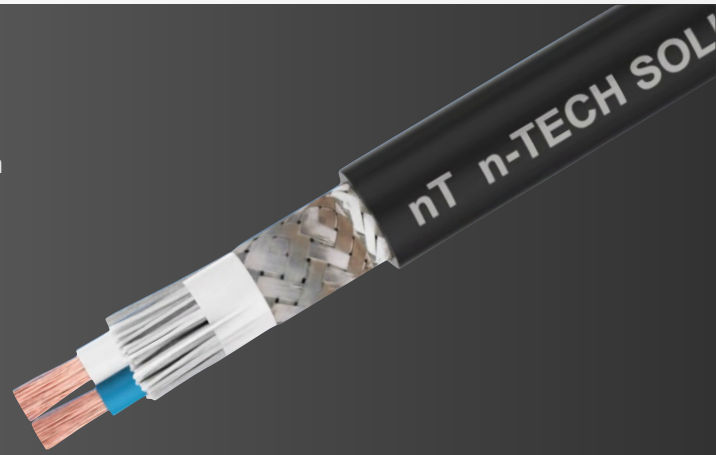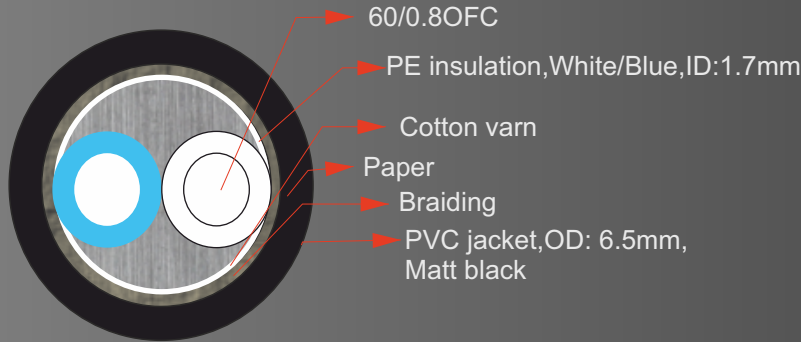

MANUFACTURE STANDARD

Proceeding	Description/Color	Material	Thickness	OD	Shape	Cond ohm/m	Electronic conductivity	Tension KG	Current A	Reated Voltage
Conductor	60/0.08mm±0.01	OFC				61.3 Ω	98%	8	11	
Insulation	White/Blue	PE		1.7mm±0.2	Round					
Filler		Cotton Yarn								
Shield		Paper								
Braiding	128/0.12mm±0.1	TC								
Jacket	Matt Black/ Matt Pearl Green/ Matt Pearl Grey/ Matt Pearl Brown	PVC	1.30±0.2mm	6.5mm±0.2	Round					300V
Printing	Yes									
Printing Contents	nT n-TECH SOLUTIONS OFC MICROPHONE ULTRA FLEX PURE SOUND CABLE ---24AWG--- nT 2C MIC002									

SPECIFICATION

Length	:	100Meters, Minimum	Q'ty/Carton	:	2 Spool
Spool size	:	PK-250x125x140x6mm	Net Weight	:	13.0 Kgs
Spool sticker	:	NO	Gross Weight	:	14.0 Kgs
Blister	:	NO	Measure	:	0.92'

Webpage



Youtube

